HCU Manual+

This is an enhanced version of the HCU Manual control unit. The HCU Manual+control cabinet is equipped with an electric hydraulic pump unit for convenient operation.

Technical characteristics

In addition to the HCU Manual features, the HCU Manual + includes the following features:

HCU Manual+ pump

· Motor: 0,55kW

· Connection voltage: 230V 50Hz 1-phase

· Pump flow rate: 0,57 or 1,35 I/min

· Check valve

· Pressure range: 35...200 bar

· Suction filter


· Connection hoses

Oil tank

Reservoir capacity: 2,5 lt.

| | Runtime 0-100% (s) | |
|--------------|--------------------|----------------|
| Hydrox model | Pump flow rate | Pump flow rate |
| | 0,57 I/min | 1,35 I/min |
| Hydrox 035BP | 10 | 4 |
| Hydrox 2 | 37 | 16 |
| Hydrox 4 | 84 | 36 |
| Hydrox 8 | 153 | 64 |
| Hydrox 16 | 326 | 138 |
| Hydrox 32 | 516 | 218 |
| Hydrox 64 | 921 | 389 |



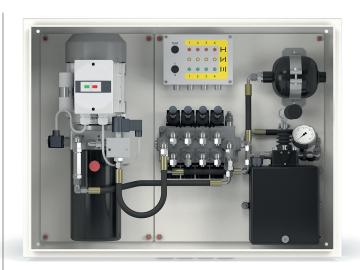

| Model | Flow rate | Product no. |
|---------|------------|-------------|
| Manual+ | 0,57 l/min | 811000 |
| Manual+ | 1,35 I/min | 811001 |

www.vexve.com